

# TI2007-054

## Inline Aviation Receptacle to 2-Pin Cat<sup>®</sup> Jump Start Connector 2' Cable Assembly



Power Anytime, Anywhere

The Tesla™ Inline Aviation Receptacle to Tesla™ 2-Pin Cat<sup>®</sup> Connector is constructed from a rugged combination of advanced composite materials and corrosion-resistant alloys, and features Tesla's Inline Aviation Receptacle. The result is a weatherproof assembly that will withstand the harshest battlefield conditions and other extreme environments.

### Features:

- Rated to 3000 peak amps
- UV, fuel, fungus, oil, and water resistant
- Tested to withstand 50 G of shock
- Exceeds MIL-STD-810F
- Manufactured by Tesla™
- 2' 1Ø Cable
- 2 Year Warranty




Tesla™ Industries, Inc.  
www.teslainsd.com ♦ www.tesla1.com  
Email: tesla1@teslainsd.com  
**Headquarters:** (302) 324-8910  
101 Centerpoint Blvd. New Castle, DE 19720  
**Western Regional Office:** (775) 622-8801  
9475 Double R Blvd. Suite 2, Reno, NV 89521



The **POWER**  
Of  
**RED**™



# Components and Technical Specifications

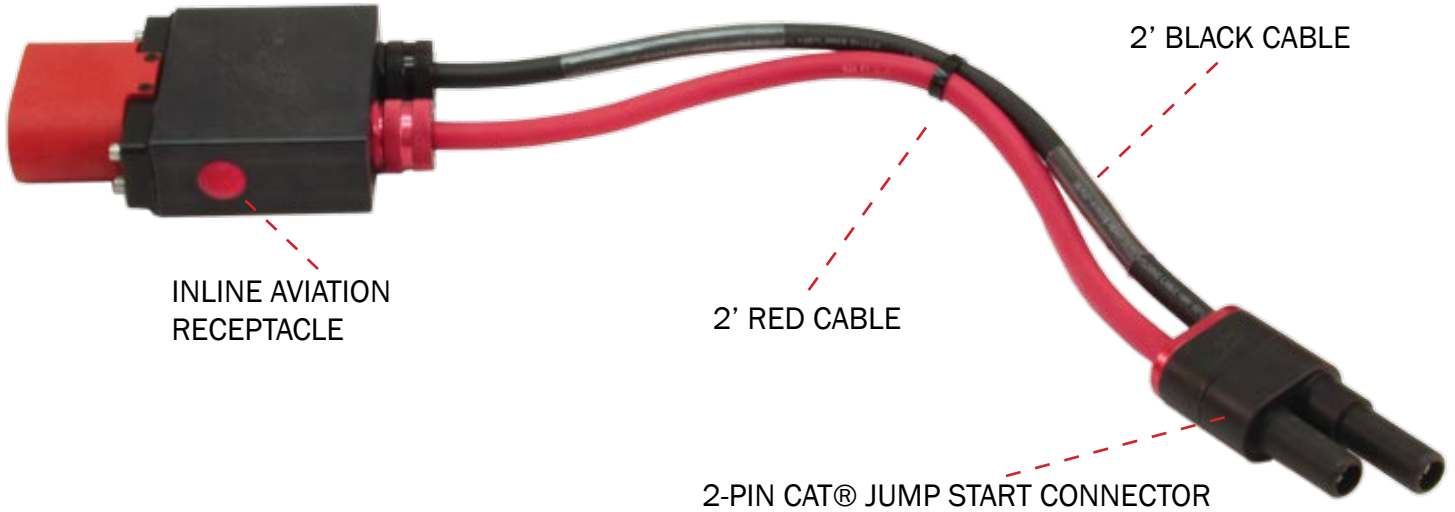

<b>Technical Specifications:</b>	
Rated Voltage	18 - 32 Vdc
Inrush Current (@ 28 Vdc)	3000 A
Rated Current	1500 A
Peak Current	3000 A
Storage Temperature	-65 °C - 125 °C (-85 °F - 257 °F)
Operating Temperature	-40 °C - 110 °C (-40 °F - 230 °F)
Air Gap-leakage Path	0.253" (6.4 mm)
Protection Class	IP28C
Cable Length	2'
Weight	4.4 lbs (2.00 kg)
Warranty	2 years (3 years optional)



Tesla™ 2-Pin Cat® Connector



Inline Aviation Receptacle