

# TI2000-421

## 2-Pin CAT<sup>®</sup> Jump Start Receptacle

The Tesla<sup>™</sup> 2-Pin CAT<sup>®</sup> Jump Start Receptacle is constructed from a rugged combination of advanced composite materials and corrosion-resistant alloys. It has been engineered to be compatible with Caterpillar<sup>®</sup> equipment. The result is a weatherproof assembly that will withstand the harshest environments.



Power Anytime, Anywhere

### Features:

- Works with our Cat<sup>®</sup> Jump Start Connector (TI2000-294) or other standard Cat<sup>®</sup> Jump Start Connectors.
- Rated to 3000 peak amps
- UV, fuel, fungus, water and oil resistant
- Manufactured by Tesla<sup>™</sup>




Tesla<sup>™</sup> Industries, Inc.  
www.teslaind.com ♦ www.tesla1.com  
Email: tesla1@teslaind.com  
**Headquarters:** (302) 324-8910  
101 Centerpoint Blvd. New Castle, DE 19720  
**Western Regional Office:** (775) 622-8801  
9475 Double R Blvd. Suite 2, Reno, NV 89521



The **POWER**  
of  
**RED**<sup>™</sup>



# Components - Specifications - Parts

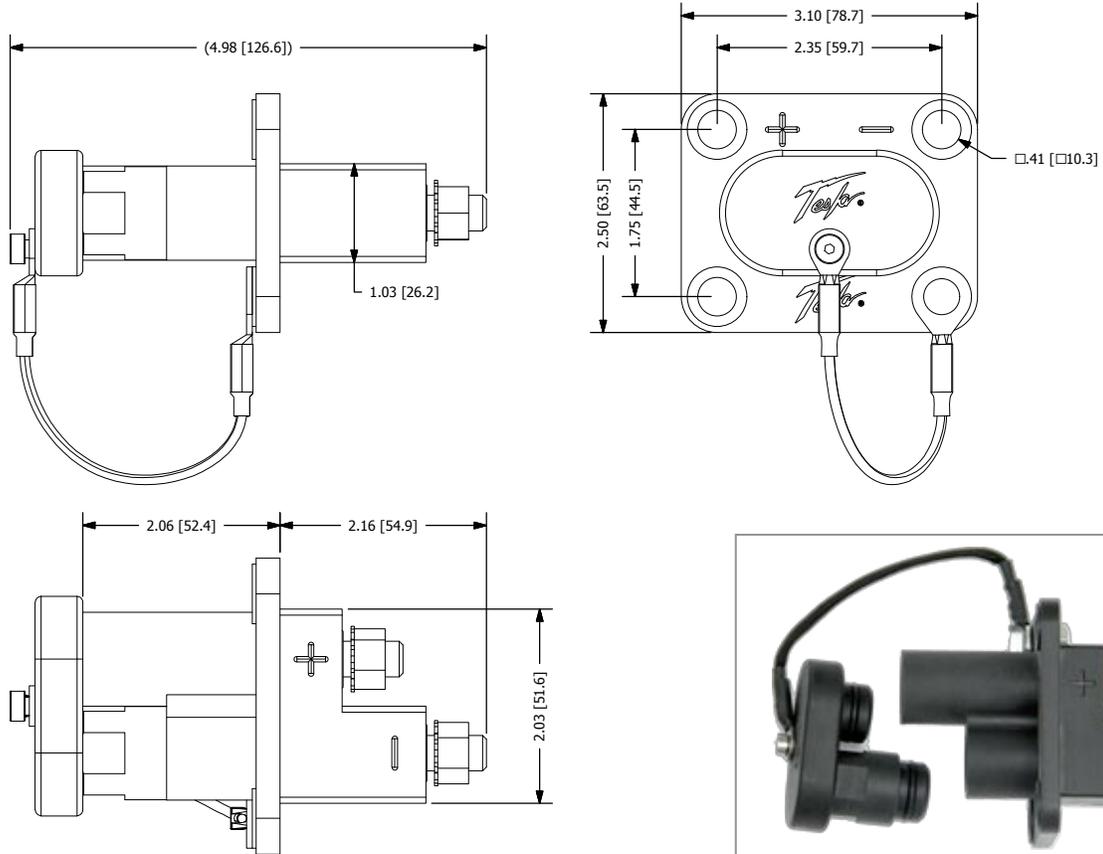

\* All dimensions are in inches [millimeters]

## Technical Specifications:

Rated Voltage	18 - 32 Vdc
Rated Current	1500 A
Peak Current	3000 A
Weight	0.6 lbs. (0.25 kg)
Warranty	2 years (3 years optional)



Top View



Front View

## Replacement Parts:



Top / Back View